

| | ENGLISH | SI | |
|--------------------------------------|-----------------------|------------------------------|-----|
| Performance | | | |
| Sensitivity (±15 %) | 100 mV/g | 10.2 mV/(m/s ²) | [2] |
| Measurement Range | ±50 g | ±490 m/s ² | |
| Frequency Range (±3 dB) | 20 to 600000 cpm | 0.33 to 10000 Hz | [3] |
| Resonant Frequency | 1080 kcpm | 18 kHz | [1] |
| Broadband Resolution (1 to 10000 Hz) | 1000 µg | 9810 µm/s ² | [1] |
| Non-Linearity | ±1 % | ±1 % | [4] |
| Transverse Sensitivity | ≤5 % | ≤5 % | |
| Environmental | | | |
| Overload Limit (Shock) | 5000 g pk | 49050 m/s ² pk | |
| Temperature Range | -65 to +250 °F | -54 to +121 °C | |
| Temperature Response | See Graph | See Graph | |
| Enclosure Rating | IP68 | IP68 | |
| Electrical | | | |
| Settling Time (within 1% of bias) | ≤10 sec | ≤10 sec | |
| Discharge Time Constant | ≥0.5 sec | ≥0.5 sec | |
| Excitation Voltage | 18 to 28 VDC | 18 to 28 VDC | |
| Constant Current Excitation | 2 to 20 mA | 2 to 20 mA | |
| Output Impedance | <100 ohms | <100 ohms | |
| Output Bias Voltage | 8 to 12 VDC | 8 to 12 VDC | |
| Spectral Noise (10 Hz) | 50 µg/√Hz | 491 (µm/s ²)/√Hz | [1] |
| Spectral Noise (100 Hz) | 20 µg/√Hz | 196 (µm/s ²)/√Hz | [1] |
| Spectral Noise (1 kHz) | 6 µg/√Hz | 59 (µm/s ²)/√Hz | |
| Electrical Isolation (Case) | >10 ⁸ ohms | >10 ⁸ ohms | |
| Electrical Protection | RFI/ESD | RFI/ESD | |
| Physical | | | |
| Size (Hex x Height) | 7/8 in x 4.5 in | 22 mm x 114 mm | |
| Weight (without cable) | 3.3 oz | 94 gm | |
| Mounting Thread | 1/4-28 Female | Not Applicable | [5] |
| Mounting Torque | 2 to 5 ft-lb | 2.7 to 6.8 N-m | |
| Sensing Element | Quartz | Quartz | |
| Sensing Geometry | Shear | Shear | |
| Housing Material | Stainless Steel | Stainless Steel | |
| Sealing | Welded Hermetic | Welded Hermetic | |
| Electrical Connector | Armor Jacketed Cable | Armor Jacketed Cable | |
| Electrical Connection Position | Top | Top | |
| Cable Length | 10 ft | 3.0 m | |
| Cable Type | Polyurethane | Polyurethane | [6] |

OPTIONAL VERSIONS

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.


M - Metric Mount
 Supplied Accessory : Model M081A61 Mounting Stud 1/4-28 to M6 X 1 (1) replaces Model 081A40

NOTES:

[1] Typical.
 [2] Conversion Factor 1g = 9.81 m/s².
 [3] The high frequency tolerance is accurate within ±10% of the specified frequency.
 [4] Zero-based, least-squares, straight line method.
 [5] 1/4-28 has no equivalent in S.I. units.
 [6] Stainless steel armor jacket over twisted shielded pair.
 [7] See PCB Declaration of Conformance PS023 for details.

SUPPLIED ACCESSORIES:

Model 081A40 Mounting Stud (1)
 Model ICS-2 NIST-traceable single-axis single-point amplitude response calibration at 6000 cpm (100 Hz)

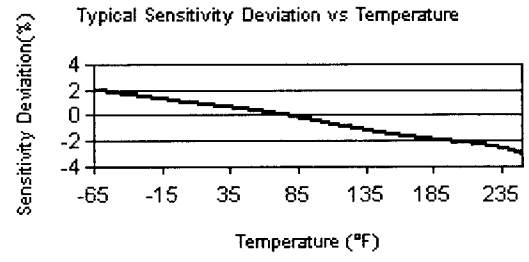

| | | | | |
|----------------------|----------------------|----------------------|-----------------------|--------------|
| Entered: <i>MWS</i> | Engineer: <i>MWS</i> | Sales: <i>BBJ</i> | Approved: <i>NR</i> | Spec Number: |
| Date: <i>10.4.02</i> | Date: <i>10.4.02</i> | Date: <i>10/9/02</i> | Date: <i>10/16/02</i> | 11075 |

All specifications are at room temperature unless otherwise specified.
 In the interest of constant product improvement, we reserve the right to change specifications without notice.
 ICP® is a registered trademark of PCB Group, Inc.

IMI SENSORS
 A PCB PIEZOTRONICS DIV.
 3425 Walden Avenue, Depew, NY 14043

Phone: 800-959-4464
 Fax: 716-684-3823
 E-Mail: imi@pcb.com