

Model Number
626A04

SEISMIC ICP® ACCELEROMETER

Revision: C
ECN #: 28854

Performance

Sensitivity(± 5%)
Measurement Range
Frequency Range(± 5%)
Frequency Range(± 10%)
Frequency Range(± 3 dB)
Resonant Frequency
Broadband Resolution(1 to 10,000 Hz)
Non-Linearity
Transverse Sensitivity

Environmental

Overload Limit(Shock)
Temperature Range
Temperature Response

Electrical

Excitation Voltage
Constant Current Excitation
Output Impedance
Output Bias Voltage
Discharge Time Constant
Settling Time(within 1% of bias)
Spectral Noise(1 Hz)
Spectral Noise(10 Hz)
Spectral Noise(100 Hz)
Electrical Isolation
Electrical Protection

Physical

Sensing Element
Sensing Geometry
Housing Material
Sealing
Size (Diameter x Height)
Weight
Electrical Connector
Electrical Connection Position
Mounting Thread
Mounting Torque

ENGLISH

10 V/g
± 0.5 g
6 to 12,000 cpm
4 to 18,000 cpm
2 to 30,000 cpm
60 kcpm
0.5 µg
± 1 %
≤ 5 %
± 40 g
0 to +150 °F
See Graph


SI

1.02 V/(m/s²)
± 4.9 m/s²
0.1 to 200 Hz
0.07 to 300 Hz
0.04 to 500 Hz
1 kHz
5.0 µm/s²
± 1 %
≤ 5 %
± 392 m/s²
-18 to +65 °C
See Graph
24 to 28 VDC
2 to 10 mA
<500 ohm
8 to 12 VDC
≥ 5 sec
≤ 5 min
0.06 µg/√Hz
0.02 µg/√Hz
0.01 µg/√Hz
>10⁸ ohm
RFI/ESD

ENGLISH

Ceramic
Flexural
Stainless Steel
Welded Hermetic
2-1/4 in x 2.8 in
22 oz
Top
2-Pin MIL-C-5015
1/4-28 Female
2 to 5 ft-lb
Ceramic
Flexural
Stainless Steel
Welded Hermetic
57.2 mm x 53.3 mm
624 gm
2-Pin MIL-C-5015
Top
No Metric Equivalent
2.7 to 6.8 N-m

Typical Sensitivity Deviation vs Temperature

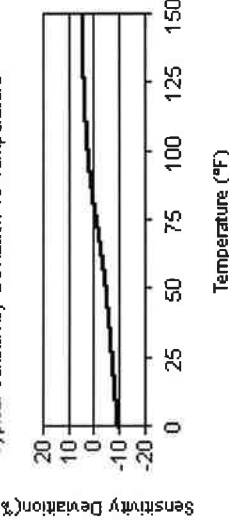

All specifications are at room temperature unless otherwise specified.
In the interest of constant product improvement, we reserve the right to change specifications without notice.
ICP® is a registered trademark of PCB Group, Inc.



OPTIONAL VERSIONS

Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.

M - Metric Mount

Supplied Accessory : Model M081A61 Mounting Stud 1/4-28 to M6 X 1 replaces Model 081A40

NOTES:

- [1] Typical value.
- [2] Conversion Factor 1g = 9.81 m/s².
- [3] 1Hz = 60 cpm (cycles per minute).
- [4] The high frequency tolerance is accurate within ±10% of the specified frequency.
- [5] Zero-based, least-squares, straight line method.
- [6] 1/4-28 has no equivalent in S.I. units.
- [7] See PCB Declaration of Conformance PS023 for details.

SUPPLIED ACCESSORIES:

Model 081A40 Mounting Stud (1)
Model ICS-1 NIST-traceable single-axis amplitude response calibration from 600 cpm (10 Hz) to upper 5% frequency

Entered: <i>SA</i>	Engineer: <i>EC</i>	Sales: <i>SA</i>	Approved: <i>NK</i>	Spec Number:
Date: 5/29/08	Date: 5/30/08	Date: 5/30/08	Date: 5/30/08	8289



3425 Walden Avenue, Depew, NY 14043

Phone: 800-959-4464
Fax: 716-684-3823
E-Mail: imi@pcb.com