


	ENGLISH	SI	
Performance			
Sensitivity(± 10 %)	3 pC/g	0.31 pC/(m/s ²)	
Measurement Range	± 2300 g pk	± 22,600 m/s ² pk	
Frequency Range(+5 %)	12 kHz	12 kHz	[2]
Frequency Range(+10 %)	16 kHz	16 kHz	[2]
Frequency Range(+3 dB)	26 kHz	26 kHz	[2]
Resonant Frequency	≥ 50 kHz	≥ 50 kHz	
Non-Linearity(1600 g, 15700 m/s ²)	≤ 1 %	≤ 1 %	[3]
Non-Linearity	≤ 2 %	≤ 2 %	[3]
Transverse Sensitivity	≤ 5 %	≤ 5 %	
Environmental			
Overload Limit(Shock)	± 10,000 g pk	± 98,100 m/s ² pk	
Temperature Range	-95 to +500 °F	-71 to +260 °C	
Temperature Response	See Graph	See Graph	[1]
Base Strain Sensitivity	0.002 g/με	0.02 (m/s ²)/με	[1]
Electrical			
Capacitance	485 pF	485 pF	[1]
Insulation Resistance(at 70° F [21°C])	>10 ¹² ohm	>10 ¹² ohm	
Insulation Resistance(at 500°F)	>10 ⁸ ohm	>10 ⁸ ohm	[1]
Output Polarity	Negative	Negative	
Physical			
Sensing Element	Ceramic	Ceramic	
Sensing Geometry	Shear	Shear	
Housing Material	Titanium	Titanium	
Sealing	Welded Hermetic	Welded Hermetic	
Size (Hex x Height)	0.28 in x 0.64 in	7.1 mm x 16.3 mm	
Weight	0.071 oz	2.0 gm	[1]
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack	
Electrical Connection Position	Top	Top	
Mounting Thread	5-40 Male	5-40 Male	

OPTIONAL VERSIONS			
Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.			
A - Adhesive Mount			[4]
Supplied Accessory : Model 080A90 Quick Bonding Gel (1)			
J - Ground Isolated			
Frequency Range(+5 %)	10 kHz	10 kHz	
Frequency Range(+10 %)	13.5 kHz	13.5 kHz	
Resonant Frequency	>49 kHz	>49 kHz	
Electrical Isolation(Base)	>10 ⁸ ohm	>10 ⁸ ohm	
Size - Hex x Height	0.375 in x 0.72 in	9.52 mm x 18.3 mm	
Weight	0.11 oz	3.2 gm	
M - Metric Mount			
Mounting Thread	M3 x 0.50 Male	M3 x 0.50 Male	
P - Positive Output Polarity			
Output Polarity	Positive	Positive	
W - Water Resistant Cable			[5]
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable	
Electrical Connection Position	Top	Top	

NOTES:
 [1] Typical.
 [2] Low frequency response is determined by external signal conditioning electronics.
 [3] Zero-based, least-squares, straight line method.
 [4] Adhesive mounting base is not required. "Quick Bonding Gel" has maximum temperature range of 180 ° F (82°C).
 [5] Capacitance will vary based on cable length. Typical cable capacitance is 29 pF/ft (95 pF/m).

SUPPLIED ACCESSORIES:
 Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1)

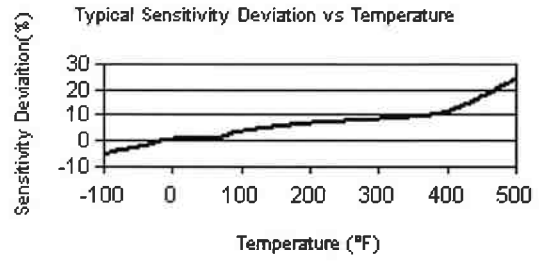

All specifications are at room temperature unless otherwise specified.
 In the interest of constant product improvement, we reserve the right to change specifications without notice.

ICP® is a registered trademark of PCB Group, Inc.

Entered: BLS	Engineer: JJB	Sales: WDC	Approved: EB	Spec Number:
Date: 3/2/09	Date: 2/10/09	Date: 2/10/09	Date: 2/23/09	1326

PCB PIEZOTRONICS™
 VIBRATION DIVISION
 3425 Walden Avenue, Depew, NY 14043

Phone: 716-684-0001
 Fax: 716-685-3886
 E-Mail: vibration@pcb.com