

3DM-GX5™ -15

Vertical Reference Unit (VRU)




3DM-GX5™-15- miniature, high-performance, industrial-grade inertial measurement unit (IMU) and vertical reference unit (VRU)

The LORD Sensing 3DM-GX5 family of high-performance, industrial-grade inertial sensors provides a wide range of triaxial inertial measurements and computed attitude and navigation solutions.

In all models, the Inertial Measurement Unit (IMU) includes direct measurement of acceleration and angular rate, and are fully temperature-compensated and calibrated over the operating temperature. The use of Micro-Electro-Mechanical System (MEMS) technology allows for highly accurate, small, lightweight devices.

The LORD Sensing **MIP Monitor** software can be used for device configuration, live data monitoring, and recording. Alternatively, the **MIP Data Communications Protocol** is available for development of custom interfaces and easy OEM integration.

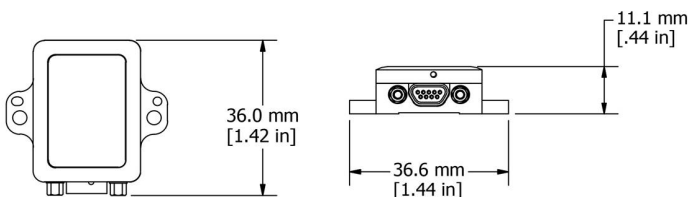

Product Highlights

- Triaxial accelerometer, gyroscope, temperature sensors achieve the optimal combination of measurement qualities
- Dual on-board processors run a new Auto-Adaptive Extended Kalman Filter (EKF) for outstanding dynamic pitch and roll.
- Smallest, lightest, highest performance VR in its class

Features and Benefits

Best in Class Performance

- Fully calibrated, temperature-compensated, and mathematically-aligned to an orthogonal coordinate system for highly accurate outputs
- Bias tracking, error estimation, threshold flags, and adaptive noise modeling allow for fine tuning to conditions in each application
- High-performance, low-drift gyros with noise density of $0.005^\circ/\text{sec}/\sqrt{\text{Hz}}$ and VRE of $0.001^\circ/\text{s}/g^2\text{RMS}$
- Accelerometer noise as low as $25 \mu g/\sqrt{\text{Hz}}$

Ease of Use

- User-defined sensor-to-vehicle frame transformation
- Easy integration via comprehensive and fully backwards-compatible communication protocol
- Robust, forward compatible MIP packet protocol

Cost Effective

- Out-of-the box solution reduces development time
- Volume discounts

Applications

- Platform stabilization, artificial horizon
- Health and usage monitoring of vehicles

Best in Class Inertial Measurement



Specifications

| General | | |
|--|---|--|
| Integrated sensors | Triaxial accelerometer, triaxial gyroscope, temperature sensors, and pressure altimeter | |
| Data outputs | Inertial Measurement Unit (IMU) outputs: acceleration, angular rate, ambient pressure, delta theta, delta velocity Computed outputs: Extended Kalman Filter (EKF): filter status, attitude estimates (Euler angles, quaternion, orientation matrix), bias compensated angular rate, pressure altitude, gravity-free linear acceleration, attitude uncertainties, gyroscope and accelerometer bias, scale factors and uncertainties, gravity models, and more. | |
| Inertial Measurement Unit (IMU) Sensor Outputs | | |
| | Accelerometer | Gyroscope |
| Measurement range | ±8 g (standard) ±2 g, ±4 g, ±20 g, ±40 g (optional) | 300°/sec (standard) ±75, ±150, ±900°/sec (optional) |
| Non-linearity | ±0.02% fs | ±0.02% fs |
| Bias instability | ±0.04 mg | 8°/hr |
| Initial bias error | ±0.002 g | ±0.04°/sec |
| Scale factor stability | ±0.03% | ±0.05% |
| Noise density | 25 µg/√Hz (2 g) | 0.005°/sec/√Hz 0.005°/sec/√Hz (300°/sec) |
| Alignment error | ±0.05° | ±0.05° |
| Adjustable bandwidth | 225 Hz (max) | 250 Hz (max) |
| Offset error over temperature | 0.06% (typ) | 0.04% (typ) |
| Gain error over temperature | 0.03% (typ) | 0.03% (typ) |
| Scale factor non-linearity (@ 25° C) | 0.02% (typ) 0.06% (max) | 0.02% (typ) 0.06% (max) |
| Vibration induced noise | -- | 0.072°/s RMS/g RMS |
| Vibration rectification error (VRE) | 0.03% | 0.001°/s/g ² RMS |
| IMU filtering | Digital sigma-delta wide band anti-aliasing filter to digital averaging filter (user adjustable) scaled into physical units. | |
| Sampling rate | 1 kHz | 4 kHz |
| IMU data output rate | 1 Hz to 1000 Hz | |
| Pressure Altimeter | | |
| Range | -1800 m to 10,000 m | |
| Resolution | < 0.1 m | |
| Noise density | 0.01 hPa RMS | |
| Sampling rate | 25 Hz | |

| Computed Outputs | |
|---------------------------------------|--|
| Attitude accuracy | EKF outputs: ±0.25° RMS roll and pitch (typ) CF outputs: ±0.5° roll and pitch (static, typ) and ±2.0° roll and pitch (dynamic, typ) |
| Attitude heading range | 360° about all axes |
| Attitude resolution | < 0.01° |
| Attitude repeatability | 0.2° (typ) |
| Calculation update rate | 500 Hz |
| Computed data output rate | EKF outputs: 1 Hz to 500 Hz CF outputs: 1 Hz to 1000 Hz |
| Operating Parameters | |
| Communication | USB 2.0 (full speed) RS232 (9,600 bps to 921,600 bps, default 115,200) |
| Power source | +4 to +36 V dc V dc |
| Power consumption | 500 mW (typ) |
| Operating temperature | -40 °C to +85 °C |
| Mechanical shock limit | 500 g (calibration unaffected) 1000 g (bias may change), 5000 g (survivability) |
| MTBF | (TBD) |
| Physical Specifications | |
| Dimensions | 36.0 mm x 36.6 mm x 11.1 mm |
| Weight | 16.5 grams |
| Enclosure material | Aluminum |
| Regulatory compliance | ROHS, CE |
| Integration | |
| Connectors | Data/power output: micro-DB9 |
| Software | MIP Monitor, Windows XP/Vista/7/8/10 compatible |
| Compatibility | Protocol compatibility across 3DM-GX3, GX4, RQ1, GQ4, and GX5 product families |
| Software development kit (SDK) | MIP data communications protocol with sample code available (OS and platform independent) |

LORD SENSING
MicroStrain

LORD Corporation
MicroStrain® Sensing Systems
459 Hurricane Lane, Suite 102
Williston, VT 05495 USA

ph: 802-862-6629
sensing_sales@LORD.com
sensing_support@LORD.com

